



Overview

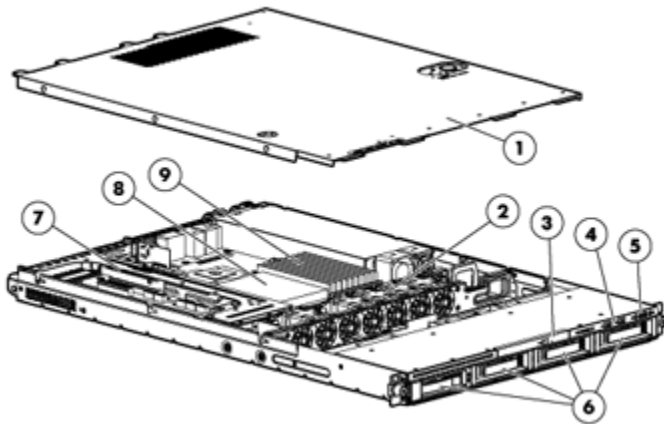

Front View:

1. Cover
2. on Hot Plug Dual Rotor Fans
3. Optional Slim 9.5mm DVD ROM
4. USB connectors (2)
5. Power Button, UID button, and Front LED Indicators
6. Support for up to four SATA or SAS Hard Drives or SSD's
7. Two PCI-Express Slots (2 PCI-Express 2.0 x16 connectors standard)
8. Processor Socket (Intel Xeon, Core 2 and Quad Core)
9. Nine DDR3 Memory Slots

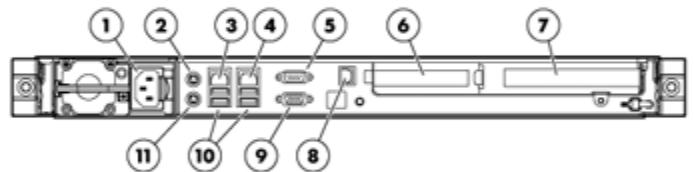

Rear View:

1. Power supply
2. Mouse connector
3. NIC 1 Port/Shared iLO 2 Management Port
4. NIC 2 Port
5. Serial connector
6. PCI Express expansion slot 5, low-profile, half-length
7. PCI Express expansion slot 4, (optional PCI-X, full-length)
8. Dedicated Integrated Lights-Out 2 (ProLiant Onboard Administrator powered by integrated Lights-Out 2) management port (optional)
9. Video connector
10. USB connectors (4)
11. Keyboard connector

What's New

- Adding Intel Xeon E5530
- Adding 400W Redundant Power Supply Kit

At a Glance

The HP ProLiant DL320 G6 Server is an enterprise rack-optimized server at an entry level price. The highly manageable 1 processor, 1U server is ideal for single-application IT infrastructure, web and edge-of-network applications.

The HP infrastructure management capabilities, combined with other Insight software, give the DL320 G6 enterprise-class management features. Support for 1 or 2 low-cost Serial ATA drives on an integrated RAID0/1 controller, with an optional upgrade to highly reliable hot plug SAS hard drives, gives the DL320 G6 flexibility to meet the needs of your datacenter. Plus, you get the cost-effective solution of a single-processor platform with options from the new Intel® Xeon® Processor 3000 sequence with turbo mode.

- **Processor:**
 - 1 Quad-Core or Dual-Core Intel Xeon processor 5500 series

Overview

- Intel 5500 Chipset with up to 6.4GT/s QPI
- **Memory:**
 - Nine (9) DIMM slots
 - Up to 72GB, using DDR3 Registered (RDIMM) memory, operating at 800MHz when fully populated at 3 DIMMs per Channel in 9 Slots
- **Storage Controller:**
 - Entry & High Efficiency Models: HP Smart Array B110i SATA RAID Controller (RAID 0/1/1+0)
NOTE: Transfer rate: 1.5Gb/s SATA
 - Performance Models: HP Smart Array P410/256MB Controller (RAID 0/1/1+0/5/5+0)
NOTE: Available upgrades: Battery Kit upgrade (for BBWC), 512MB with BBWC, and Smart Array Advanced Pack (SAAP)
- **Internal Drive Support:**
 - Standard four 3.5" (Large Form Factor) hot-plug SATA or SAS hard drives
 - Internal storage capacity of up to 4TB (4 x 1TB SATA/SAS hard drives)
 - SAS drives require optional SAS Host Bus Adapter (HBA) or Smart Array Controller
 - Optional DVD or DVD-RW drive
- **Network Controller:**
 - Embedded NC326i Dual Port Gigabit Server Adapter
- **Expansion Slots:**
 - Two total slots:
 - (1) Full length PCI Express x16 slot (x16 connector)
 - Can be replaced with a full-length 64-bit /133MHz PCI-X slot
 - (1) Half-length, low-profile PCI Express x1 slot (x4 connector)
- **USB 2.0 Ports:**
 - Up to 7 Total: (2) front; (1) internal (optional); (4) rear accessible ports
 - Internal USB port (optional) for flexible storage, security, or USB drive key deployment
- **Redundancy:**
 - Hot plug power with optional redundancy (Included in Performance models)
- **Infrastructure Management:**
 - Convenient slide-out Systems Insight Display for quick and easy front view server diagnostics, along with status LEDs, Automatic Server Recovery (ASR), ROM Based Setup Utility (RBSU)
 - HP ProLiant Onboard Administrator (powered by the HP Integrated Lights-Out 2 management processor) for simplified server setup, health monitoring and recovery, power and thermal control, and lights-out remote administration.
 - HP Insight Control (ICE) suites, as product options, deliver essential infrastructure management that can help save time and money by making it easy to deploy, monitor, control and optimize your IT infrastructure through a single, simple management console. ICE suites support both Windows and Linux-based servers and management consoles
 - HP Insight Dynamics - VSE suite for ProLiant servers, a product option, is an integrated command center that enables you to continuously analyze and optimize your adaptive infrastructure. This advanced infrastructure management software lets you reduce the cost of common data center tasks by as much as 40 percent while keeping pace with your changing business.
- **Operating Systems and Virtualization Software Support for ProLiant Servers:**
 - Supports Windows, RHEL, SLES, OEL
- **Deployment/Serviceability:**
 - Customer Self Repair (CSR): HP products are designed with many CSR parts to minimize repair time and allow for greater flexibility in performing defective parts replacement
 - Fixed, mounting rails included with all models
- **Form Factor:**
 - 1U (1.70" / 4.32 cm) Rack Mount Chassis
 - 27.56" (70.00 cm) Deep
- **Warranty:**
 - This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and parts repair is available for three years Next Business Day, with three year on-site support from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Expanded support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific

Overview

hard drive QuickSpecs for details.

- **NOTE:** Server Warranty includes three year parts, three year labor, and three year on-site support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor
One of the following depending on Model

- Quad-Core Processors**
- Intel® Xeon® Processor E5540 (2.53 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)
 - Intel® Xeon® Processor E5520 (2.26 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)
 - Intel® Xeon® Processor E5530 (2.40 GHz, 8MB L3 Cache, 80W, DDR3 1066, HT, Turbo 1/1/2/2)
 - Intel® Xeon® Processor E5506 (2.13 GHz, 4MB L3 Cache, 80W, DDR3-800)
 - Intel® Xeon® Processor E5504 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800)
 - Intel® Xeon® Processor L5520 (2.26 GHz, 8MB L3 Cache, 60W, DDR3-1066, HT, Turbo 1/1/2/2)
 - Intel® Xeon® Processor L5506 (2.13 GHz, 4MB L3 Cache, 60W, DDR3-800)
 - Intel® Xeon® Processor W3520 (2.63GHz, 8MB L3 Cache, 130W, DDR3-1066, HT, Turbo 1/1/1/2)
 - Intel® Xeon® Processor W3540 (2.93GHz, 8MB L3 Cache, 130W, DDR3-1066, HT, Turbo 1/1/1/2)

- Dual-Core Processors**
- Intel® Xeon® Processor E5502 (1.86 GHz, 4MB L3 Cache, 80W, DDR3-800)
- NOTE:** HT indicates that the processor model supports Intel® Hyper-Threading Technology.
NOTE: Turbo indicates the maximum potential frequency increment when using Intel® Turbo Boost Technology, with 4, 3, 2, and 1 cores active.
NOTE: DDR3 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.
NOTE: For the Intel 5500 Series, the letter preceding the model number indicates the performance/wattage of the processor. ; "E" denotes Enterprise Performance/Wattage (Mainstream); and "L" denotes Lower Wattage.

Cache Memory
One of the following depending on Model

4MB (1 x 4MB) Level 3 Cache

Chipset

Intel 5500 Chipset

NOTE: For more information regarding Intel chipsets, please see the following URL:
<http://www.intel.com/products/server/chipsets/>.

Memory Protection

Advanced ECC
Mirroring mode
Lock-step mode

NOTE: Xeon W3500 processor family does not support any of above advanced features.

Memory
One of the following depending on Model

Type	DDR3 1067/1333 Registered (RDIMM) and Unbuffered (UDIMM)
Standard (Entry Models)	4 GB (2 x 2 GB) RDIMM
Standard (High Efficiency Models)	4 GB (2 x 2 GB) UDIMM
Maximum Memory	Up to 72 GB, using DDR3 Registered (RDIMM) memory, operating at 800MHz when fully populated at 3 DIMMs per Channel in 9 Slots. Up to 24 GB, using DDR3 Unbuffered (UDIMM) memory, operating at 1066MHz when fully populated at 2 DIMMs per Channel in 6 slots.



Standard Features

Network Controller Embedded NC326i Dual Port Gigabit Server Adapter

Expansion Slots

Expansion Slots #	Technology	Bus Width**	Connector Width	Bus Number*	Form Factor	Notes
5 (Standard)	PCIe	x4	x16	10	Low profile (half length, half height) slot	
4 (Standard)	PCIe	x16	x16	21	Full length, full height slot	This PCIe slot can be replaced with optional PCI-X slot below
4 (Optional)	PCI-X (133MHz, 3.3Volt)	64-bit	Not applicable	24	Full length, full height slot	

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number

** Indicates the number of physical electrical lanes running to the connector.

Storage Controllers	Entry Models	Integrated Intel® 82801IR Serial ATA Host Controller with RAID 0/1 support. NOTE: Hot Plug SAS and SATA controllers available via PCI card option.
	High Efficiency Models	Integrated Intel® 82801IR Serial ATA Host Controller with RAID 0/1 support. NOTE: Hot Plug SAS and SATA controllers available via PCI card option.
	Performance Models	HP Smart Array P410/256MB Controller (RAID 0/1/1+0/5/5+0) NOTE: Available upgrades: Battery Kit upgrade (for BBWC), 512MB with BBWC, and Smart Array Advanced Pack (SAAP)

Storage	Optical Drive	Optional: 9.5mm DVD-ROM, or DVD RW drive
	Hard Drives	None ship standard

Maximum Internal Storage Type	SATA (4HDD models - requires optional 4HDD cage)	4TB	4 x 1TB
	SAS (4HDD models - requires optional PCI controller)	4TB	4 x 1TB

Standard Features

Interfaces	Serial	1
	Pointing Device (Mouse)	1
	Keyboard	1
	VGA	2 (rear)
	Network RJ-45	2
	USB 2.0	7 (2 front, 1 internal (optional), 4 rear)
	NOTE: Please see the following URL for additional information regarding USB support: http://h18004.www1.hp.com/products/servers/platforms/usb-support.html	
<hr/>		
Graphics	Integrated ATI ES1000, 32 MB video standard	
	<ul style="list-style-type: none">• 16 bit color: maximum resolution of 1600 x 1200• 32 bit color: maximum resolution of 1280 x 1024	
	NOTE: Maximum resolution available via iLO 2 remote console is 1280 x 1024.	
<hr/>		
Form Factor	Rack (1U), (1.70 in/4.32 cm), 26.85" deep	
<hr/>		
Core Infrastructure Management	HP Insight Foundation suite	Managing the growing number of servers can be complex and expensive for your organization. IT managers need to address changing business needs with tools that meet the challenges of managing today's complex Datacenters.
		HP provides management solutions that are designed to simplify a server's installation, configuration and maintenance throughout the entire server lifecycle. This provides the customer with higher levels of operational efficiency and highly reliable systems: www.hp.com/go/foundation .
		The foundation pack includes: <ul style="list-style-type: none">• HP SmartStart• HP Management• HP ProLiant Firmware Maintenance
		SmartStart version supported (minimum): SmartStart 8.20 http://www.hp.com/servers/smartstart
	ProLiant Onboard Administrator	HP ProLiant Onboard Administrator (powered by the HP Integrated Lights-Out 2 management processor) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP ProLiant Onboard Administrator functions without additional software, and can be accessed from any location via a web browser. It works hand-in-hand with HP Systems Insight Manager, Insight Control suites, and the Insight Dynamics-VSE suite helping customers unlock the value of the ProLiant platform and deliver the highest possible quality of IT service to the business. See www.hp.com/go/ProLiantOA
	HP Insight Control (ICE) suites	HP Insight Control (ICE) suites, as product options, deliver essential infrastructure management that can help save time and money by making it easy to deploy, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. ICE suites install and license software modules that are integrated into HP System

Standard Features

Insight Manager.

Two Insight Control suites are available, to serve environments requiring either Linux-based or Windows-based management consoles: HP Insight Control suite for Linux (ICE-LX), and HP Insight Control suite (ICE). See www.hp.com/go/insightcontrol

HP Insight Control suites include one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <http://www.hp.com/services/insight>.

HP Insight Dynamics - VSE suite

The HP Insight Dynamics - VSE suite for ProLiant, a product option, is an integrated command center that enables you to continuously analyze and optimize your adaptive infrastructure. This advanced infrastructure management software that allows you to analyze and optimize your adaptive infrastructure to manage physical and virtual resources in the same way. HP Insight Dynamics - VSE gives you a powerful toolkit to accelerate complex technology projects and simplify daily operations. It enables you to plan capacity and power continuously, balance across physical and virtual resources, ensure cost-effective high availability, and provision infrastructure consistently.

HP Insight Orchestration, an optional extension to Insight Dynamics - VSE, enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements.

HP Insight Recovery, also an optional extension for Insight Dynamics - VSE, enables cost-effective disaster recovery for physical and virtual environments. Application environments can be reactivated in minutes with the touch of a button to a remote location

NOTE: For more information, visit:
<http://www.hp.com/go/insightdynamics>,
<http://www.hp.com/go/insightorchestration>,
<http://www.hp.com/go/insightrecovery>

Industry Standard Compliance

- ACPI 2.0 Compliant
- PCI 3.0 Compliant
- PXE Support
- WOL Support
- Microsoft® Logo certifications
- USB 2.0 Support
- IPMI 2.0



Standard Features

Intelligent
Manageability

- Automatic Server Recovery (ASR)
- iLO 2 Advanced Pack (optional)
- HP Systems Insight Manager
- Integrated Management Log
- Drive Parameter Tracking (with Smart Array Controllers)
- Dynamic Sector Repairing (with Smart Array Controllers)
- Pre-Failure Warranty (covers processors, SAS hard drives, and memory)
- BIOS Serial Console
- Front and Rear Unit ID (UID) button/LED

Security

- Power-on password
- USB Port control
- Removable optical drive assembly (optional)
- Removable DVD-ROM Drive Assembly (optional)
- Dedicated iLO2 port (optional)
- Serial interface control
- Administrator's password

Security - Trusted
Platform Module

Trusted Platform Module option kit

The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline.

For more information about TPM, including a white paper, go to: www.hp.com/go/TPM

NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.

NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

Server Power Cords

- | | |
|---------------|--|
| North America | One 6' Highline (IEC-IEC) power cord ships standard |
| Japan | One 6' Highline (IEC) power cord and one 6' Lowline power cord ship standard |
| ROW | One 6' Highline (IEC) power cord ships standard |
- NOTE:** HP ProLiant DL320 G6 servers ship standard worldwide with a C13 to C14 2M Highline jumper cord. Japanese models also include a 2M Lowline power cord. If customers require a local power cord, they can check the power cord matrix for the appropriate country specific cord. Please see the following power cord matrix: <http://www.hp.com/go/powercordmatrix>

Power Supply

- | | |
|------------------------|---|
| Entry Models | 400Watts, non-redundant, 72% Efficiency |
| High Efficiency Models | 500Watts, non-redundant, 92% efficient |
| Performance Models | (2) 400Watts, redundant hot plug power supplies |

Standard Features

Common Slot ProLiant	<ul style="list-style-type: none">460Watts, Common Slot, non-redundant, 92% EfficiencyNOTE: This power supply is needed to support power capping and power monitoring <p>HP's ProLiant Common Slot Power 460W supply meets multiple Energy Efficiency Initiatives. Climate Savers Computing Initiative GOLD, ECOS Consulting 80PLUS GOLD and plans on offering models that meet the Energy Star for Server requirements when they are published.</p>
UPS and PDU Power Cord Matrix	Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords .
System Fans	5 dual rotor fans ship standard
Ultra Thin Rack Deployment Overview	For the Ultra Thin Rack Deployment Overview, including best practices for the HP ProLiant DL320 G6, please see the following URL: www.hp.com/servers/proliantdl320-g6 .
Required Cabling	For required cabling information, refer to the Web site at: www.hp.com/servers/proliantdl320-g6 .
Operating Systems and Virtualization Software Support for ProLiant Servers	Microsoft Windows Server Microsoft Windows Server Hyper V Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) Oracle Enterprise Linux (OEL) NOTE: Support differences will exist between the SATA and SAS configurations. NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: www.hp.com/go/ossupport and our driver download site www.hp.com/support/DL320G6 .
Rack Airflow Requirements	Rack 10000 G2 series Cabinets The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 G2 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors. CAUTION: If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment: <ul style="list-style-type: none">Front and rear doors: If your 42U server rack includes closing front and rear doors, you must allow 5,350 sq cm (830 square inches) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation).Side: The clearance between the installed rack component and the side panels of the rack must be a minimum of 7 cm (2.75 inches) CAUTION: Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage. NOTE: For additional information, refer to the Setup and Installation Guide or the Documentation CD provided with the server, or to the server documentation located in the Support section at the following URL: www.hp.com/servers/proliantdl320g6 .

Standard Features

Rack Kit

Quick deploy rail system provides tool-free support for racks with square or round mounting holes (including Compaq/HP 7000, 9000, 10000 G2 and HP series), with an adjustment range of 24" - 36". The ambidextrous cable management arm can be mounted on either the left or right side for improved cable management.

Telco Rack Support

Support for all 2-post Telco racks requires the use of the standard rack kit and an additional option kit from Rack Solutions at: <http://www.racksolutions.com/hp/>

HP Factory Express Capabilities

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAXxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

HP Enterprise Configurator

The HP eConfigure-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.
<http://www.hp.com/products/configurator>.

Service and Support

HP Care Pack Services provide total care and support expertise with committed response times designed to meet your IT and business needs.

HP Care Pack services include coverage for the HP branded hardware options qualified for the server that are purchased at the same time or afterward and internal to the enclosure. It also includes the 22-inch and smaller external monitors and tower UPS options up to 3kVA. These items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included and standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of support solutions provides a range of support services designed to meet the varying needs of your business. Whether an SMB, or large global corporation, HP has ProLiant server support offers to help you speedily deploy and maximize system uptime.

Recommended Service - simplify ProLiant solution implementation, maintenance, and management.

- **Support** - 3 Year 9x5 Next Business Day coverage, excluding HP holidays only
- **Deployment Service** - HW Installation only

Enhanced Service - optimize service level to increase IT performance and availability.

- **Support** - 3 Year 13x5 Same Business Day, 4-Hour response coverage only
- **Deployment Service** - Installation and Start up only

Standard Features

Refer to the information on the Installation of a ProLiant on the ProLiant Data Sheet; to be delivered on a scheduled basis 8am-5pm, M-F, excluding HP holidays.

NOTE: For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

HP DL320 G6 Entry Models HP DL320G6 E5502 505682-xx1	Processors	Intel® Xeon® Processor E5502 (1.86 GHz, 4MB L3 Cache, 80 Watts, DDR3-800)
	Cache Memory	4MB L3 Cache
	Memory	4 GB (2 x 2 GB) DDR3 RDIMM
	Network Controller	Embedded NC326i Dual Port Gigabit Server Adapter
	Storage Controller	HP Smart Array B110i SATA RAID Controller (RAID 0/1/0+1)
	Hard Drives	None ship standard
	Internal Storage	Up to 4 x 1TB 3.5" Hot plug SATA/SAS, Maximum NOTE: SAS requires optional PCI Controller.
	Optical Drive	Optional
	Power Supply	Auto-sensing 400-Watt PFC Power Supply, CE Mark Compliant
	Fans	5 dual rotor fans ship standard
	Form Factor	Rack (1U), (1.70 in/4.32 cm)

HP DL320 G6 High Efficiency Models HP DL320G6 L5506 505683-xx1	Processors	Intel® Xeon® Processor L5506 (2.13 GHz, 4MB L3 Cache, 60W, DDR3-800)
	Cache Memory	4MB L3 Cache
	Memory	4 GB (2 x 2 GB) DDR3 UDIMM
	Network Controller	Embedded NC326i Dual Port Gigabit Server Adapter
	Storage Controller	HP Smart Array B110i SATA RAID Controller (RAID 0/1/0+1)
	Hard Drives	None ship standard
	Internal Storage	Up to 4 x 1TB 3.5" Hot plug SATA/SAS, Maximum NOTE: SAS requires optional PCI Controller.
	Optical Drive	Optional
	Power Supply	500-Watt PFC Power Supply, CE Mark Compliant
	Fans	5 dual rotor fans ship standard
	Form Factor	Rack (1U), (1.70 in/4.32 cm)

HP DL320 G6 Performance Models HP DL320G6 E5530 505684-xx1	Processors	Intel® Xeon® Processor E5530 (2.40 GHz, 8MB L3 Cache, 80W, DDR3 1066, HT, Turbo 1/1/2/2)
	Cache Memory	8MB L3 Cache
	Memory	6 GB (3 x 2 GB) DDR3 RDIMM
	Network Controller	Embedded NC326i Dual Port Gigabit Server Adapter
	Storage Controller	HP Smart Array P410/256MB with BBWC Controller
	Hard Drives	None ship standard
	Internal Storage	4 x 1TB 3.5" Hot plug SATA/SAS
	Optical Drive	Optional
	Power Supply	(2) 400W Redundant Hot Plug Power Supply
	Fans	5 dual rotor fans ship standard
	Form Factor	Rack (1U), (1.70 in/4.32 cm)

Models

Country Code Key	xx=00	U.S.
	xx=20	Brazil
	xx=29	Japan
	xx=37	APD
	xx=42	Euro
	xx=AA	PRC

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above. Configure-to-order servers must start with a CTO Chassis.

NOTE: FIO indicates that this option only available as a Factory Installable Option.

Step 1: Base Configuration (choose one of the following configurable models)

Models	DL320G6 CTO (Configure to Order) Chassis	505768-B21
	Includes:	
	Embedded NC326i Dual Port Gigabit Server Adapter	
	1 full length PCI Express x16 slot and 1 half length low profile PCI Express x4 slot	
	Integrated Lights-Out 2 (ProLiant Onboard Administrator powered by Integrated Lights-Out 2) embedded (shared NIC functionality standard)	
	HP Smart Array B110i SATA RAID Controller (RAID 0/1/0+1)	
	Rack (1U) form factor, (1.70 in/4.32 cm)	
	Fixed, mounting rails	

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

Processors	Quad-Core Processors	
	Intel® Xeon® Processor E5504 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800), FIO	512058-L21
	Intel® Xeon® Processor E5506 (2.13 GHz, 4MB L3 Cache, 80W, DDR3-800), FIO	512059-L21
	Intel® Xeon® Processor L5506 (2.13 GHz, 4MB L3 Cache, 60W, DDR3-800), FIO	512063-L21
	Intel® Xeon® Processor E5530 (2.40 GHz, 8MB L3 Cache, 80W, DDR3 1066, HT, Turbo 1/1/2/2), FIO	512061-L21
	Intel® Xeon® Processor E5520 (2.26 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2), FIO	512060-L21
	Intel® Xeon® Processor L5520 (2.26 GHz, 8MB L3 Cache, 60W, DDR3-1066, HT, Turbo 1/1/2/2), FIO	512064-L21
	Intel® Xeon® Processor E5540 (2.53 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2), FIO	512062-L21
	Intel® Xeon® Processor W3520 (2.63GHz, 8MB L3 Cache, 130W, DDR3-1066, HT, Turbo 1/1/1/2), FIO	519748-L21
	Intel® Xeon® Processor W3540 (2.93GHz, 8MB L3 Cache, 130W, DDR3-1066, HT, Turbo 1/1/1/2), FIO	519749-L21
	Dual-Core Processors	
	Intel® Xeon® Processor E5502 (1.86 GHz, 4MB L3 Cache, 80W, DDR3-800), FIO	512057-L21
Drive Cage	HP 8SFF HDD Cage & Bkpln G6 FIO	515938-B21
	NOTE: This cage requires the P410 SAS array controller as a Primary Controller (See Step 3 below if P/N 515938-B21 is selected).	
Power Supply	DL320G6 400W Power Supply FIO Kit	515739-B21
	DL320G6 460W PL Power Supply FIO Kit	515740-B21
	DL320G6 500W NHP Power Supply FIO Kit	537150-B21

Configuration Information - Factory Integrated Models

Memory	Registered Dimms (RDIMMs)	
	HP 2GB 2Rx8 PC3-10600R-9	500656-B21
	HP 4GB 2Rx4 PC3-10600R-9 Kit	500658-B21
	HP 8GB 2Rx4 PC3-10600R-9 Kit	500662-B21
	HP 8GB 2Rx4 PC3-8500R-7 Kit	516423-B21
	Unbuffered with ECC DIMMs (UDIMMs)	
	HP 1GB 1Rx8 PC3-10600E-9 Kit	500668-B21
	HP 2GB 2Rx8 PC3-10600E-9 Kit	500670-B21
	NOTE: Depending on the memory configuration and processor model the memory speed may run at 1066MHz or 800MHz. See the Online Memory Configuration Tool for details: http://www.hp.com/go/ddr3memory-configurator .	
	NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient .	

Step 3: Choose Additional Factory Integratable Options (only one of the following from each list unless otherwise noted)

SAS HBAs	HP SC08Ge Host Bus Adapter	488765-B21
	NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.	
	HP SC11Xe Host Bus Adapter	412911-B21
Controllers	NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.	
	NOTE: Any factory integrated SAS HBA purchase automatically includes the HP HBA SAS-SATA 4x 1 LN Cable Kit (452130-B21)	
	HP Smart Array P212/256 MB w/ Battery FIO	491191-B21
	HP Smart Array P212/256MB Controller	462834-B21
	HP Smart Array P212/Zero Memory (ZM) Controller	462828-B21
	HP Smart Array P410/Zero Memory FIO Controller	462860-B21
	NOTE: May be selected if P/N 515938-B21 selected in Step 2 above.	
	HP Smart Array P410/256MB Controller	462862-B21
	NOTE: May be selected if P/N 515938-B21 selected in Step 2 above.	
	HP Smart Array P410/256 MB w/Battery FIO	491195-B21
	NOTE: May be selected if P/N 515938-B21 selected in Step 2 above.	
	HP Smart Array P410/512MB with BBWC	462864-B21
	NOTE: May be selected if P/N 515938-B21 selected in Step 2 above.	
	HP Smart Array P411/256MB Controller	462830-B21
	HP Smart Array P411/256 MB w/ Battery FIO	491193-B21
	HP Smart Array P411/512MB BBWC	462832-B21
	NOTE: Any factory integrated Smart Array Controller purchase automatically includes the HP HBA SAS-SATA 4x1LN Cable Kit (452130-B21).	

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.

Core Options

NOTE: Some options may not be factory integratable. Contact your local sales representative for additional information.

Memory	Registered Dimms (RDIMMs)	
	HP 2GB 2Rx8 PC3-10600R-9 Kit	500656-B21
	HP 4GB 2Rx4 PC3-10600R-9 Kit	500658-B21
	HP 4GB 4Rx8 PC3-8500R-7 LP Kit	500660-B21
	HP 8GB 2Rx4 PC3-10600R-9 Kit	500662-B21
	HP 8GB 2Rx4 PC3-8500R-7 Kit	516423-B21
	Unbuffered with ECC DIMMs (UDIMMs)	
	HP 1GB 1Rx8 PC3-10600E-9 Kit	500668-B21
	HP 2GB 2Rx8 PC3-10600E-9 Kit	500670-B21
	NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator .	

NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient.

Optical Drives	HP 9.5mm SATA DVD-ROM Optical Drive	481045-B21
	HP 9.5mm SATA DVD RW Optical Drive	481047-B21

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF Enterprise (ENT) Drives

HP 300GB 6G SAS 10K SFF DP ENT HDD	507127-B21
HP 300GB 3G SAS 10K SFF DP ENT HDD	492620-B21
HP 146GB 6G SAS 15K SFF DP ENT HDD	512547-B21
HP 146GB 3G SAS 15K SFF DP ENT HDD	504062-B21
HP 146GB 6G SAS 10K SFF DP ENT HDD	507125-B21
HP 146GB 3G SAS 10K SFF DP ENT HDD	418367-B21
HP 72GB 6G SAS 15K SFF DP ENT HDD	512545-B21
HP 72GB 3G SAS 15K SFF DP ENT HDD	418371-B21
HP 72GB 3G SAS 10K SFF DP ENT HDD	384842-B21

SAS Hot Plug 3.5" Enterprise (ENT) Drives

HP 600GB 6G SAS 15K 3.5" DP ENT HDD	516828-B21
HP 450GB 6G SAS 15K 3.5" DP ENT HDD	516816-B21
HP 450GB 3G SAS 15K 3.5" DP ENT HDD	454232-B21
HP 300GB 6G SAS 15K 3.5" DP ENT HDD	516814-B21
HP 400GB 3G SAS 10K 3.5" DP ENT HDD	459508-B21
HP 300GB 3G SAS 15K 3.5" DP ENT HDD	416127-B21
HP 146GB 3G SAS 15K 3.5" DP ENT HDD	384854-B21
HP 72GB 3G SAS 15K 3.5" DP ENT HDD	384852-B21

SAS Hot Plug SFF Midline (MDL) Drives

500GB 6G SAS 7.2K 2.5in DP MDL HDD	507610-B21
------------------------------------	------------



Core Options

SAS Hot Plug 3.5" Midline (MDL) Drives

HP 1TB 3G SAS 7.2K 3.5" DP MDL HDD	461137-B21
HP 750GB 3G SAS 7.2K 3.5" DP MDL HDD	461135-B21

NOTE: SAS Hard Drives are only supported with optional SAS HBA or RAID cards.
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:
http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html
(Worldwide)

SATA Hot Plug SFF Midline (MDL) Drives

HP 500GB 3G SATA 7.2K 2.5in MDL HDD	507750-B21
HP 160GB 3G SATA 7.2K 2.5in MDL HDD	530888-B21

SATA Hot Plug 3.5" Midline (MDL) Drives

HP 1TB 3G SATA 7.2K 3.5" MDL HDD	454146-B21
HP 750GB 3G SATA 7.2K 3.5" MDL HDD	458930-B21
HP 500GB 3G SATA 7.2K 3.5" MDL HDD	458928-B21
HP 250GB 3G SATA 7.2K 3.5" MDL HDD	458926-B21

SATA Hot Plug 3.5" Entry (ETY) Drives

HP 160GB 3G SATA 7.2K 3.5" ETY HDD	458945-B21
------------------------------------	------------

SATA Hot Plug SFF Entry (ETY) Drives

HP 250GB 3G SATA 5.4K SFF ETY HDD	460355-B21
HP 120GB 1.5G SATA 5.4K SFF ETY HDD	458924-B21

NOTE: SATA hard drives have a 1-year warranty. Please see the QuickSpecs for Technical Specifications and additional information:
http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html
(Worldwide)

SATA Hot Plug Midline (MDL) Solid State Drives

HP 60GB 3G SATA 2.5in MDL 1y Wty SSD	572071-B21
HP 120GB 3G SATA 3.5in MDL 1y Wty SSD	572073-B21

SATA Hot Plug 3.5" Midline (MDL) Solid State Drives

HP 60GB 3G SATA 2.5in MDL 1y Wty SSD	570761-B21
HP 120GB 3G SATA 3.5in MDL 1y Wty SSD	570763-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:
http://h18000.www1.hp.com/products/quickspecs/13415_div/13415_div.html
(Worldwide)

Core Options

Communications

Gigabit Ethernet Adapters

HP NC112T PCIe Gigabit Server Adapter	503746-B21
HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
HP NC364T PCI Express Quad Port Gigabit Server Adapter	435508-B21
HP NC373F PCI Express Multifunction Gigabit Server Adapter	394793-B21
HP NC373T PCI Express Multifunction Gigabit Server Adapter	394791-B21
HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter	458492-B21

10 Gigabit Ethernet Adapters

HP NC522SFP Dual Port 10GbE Server Adapter	468332-B21
--	------------

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each NC522SFP adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs.

Additional Options

HP Insight Control (ICE) suites, Integrated Lights-Out Advanced, Insight Rapid Deployment software	HP Insight Control suite (ICE) HP Insight Control suite, No Media 1-Server License including 1 year of 24x7 Technical Support and Updates NOTE: This part number can be purchased as a single license or as multiple licenses with a single activation key. Customer will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service. Only available directly from HP and select resellers in the Americas region.	452148-B22
	HP Insight Control Management Software Media Kit NOTE: Insight Software DVD media without licenses. Contains HP Systems Insight Manager and Insight software products and components licensed by the Insight Control suite. Uses an integrated installer to perform quick and accurate software installation and updates. NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html	436222-B21
	HP Insight Control suite for Linux (ICE-LX) HP Insight Control Environment for Linux, Media pack (DVD) - No licenses included NOTE: This optional Media pack DVD contains the ISO image for HP Insight Control suite for Linux, HP System Insight Manager, HP Insight Power Manager, HP Insight Virtual Machine Manager, and an integrated installer. Servers must be acquired separately. NOTE: This Media pack is optional because the latest ISO image and latest updates may be downloaded at no cost from: http://www.hp.com/go/ice-linux (click on Download button).	464422-B22
	HP Insight Control Environment for Linux, No Media, 1-Server license, including one year of 24x7 Technical Support and Updates NOTE: This part number can be used to purchase one (1) license with a single activation key. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service. NOTE: One certificate is shipped for each license. NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/13019_div/13019_div.html	464423-B22
	HP Integrated Lights-Out Advanced HP Integrated Lights-Out Advanced, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates NOTE: This license allows 1 server to be deployed and managed via HP iLO Advanced. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service. NOTE: For additional license kits, including electronic delivery options, please see the ProLiant OA/iLO QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.html	512485-B21
	HP Insight Rapid Deployment software HP Insight Rapid Deployment software No Media 1-Server License, including 1 year of 24x7 Technical Support and Updates NOTE: This license allows 1 server to be deployed and managed via RDP. Customer will receive a printed license entitlement certificate via physical	452151-B21



Additional Options

shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

NOTE: For additional license kits, including electronic delivery options, please see the RDP QuickSpecs at:
http://h18000.www1.hp.com/products/quickspecs/11053_div/11053_div.html

Port Options	HP DL320G6 iLO2 PORT OPT KIT	514206-B21
--------------	------------------------------	------------

Security	HP Trusted Platform Module Option Kit	488069-B21
----------	---------------------------------------	------------

Storage Controllers	SAS Controllers	
	Smart Array P212 Controller	
	HP Smart Array P212/Zero Memory Controller	462828-B21
	HP Smart Array P212/256 MB Controller	462834-B21
	Smart Array P410 Controller	
	HP Smart Array P410/256 MB Controller	462862-B21
	HP Smart Array P410/512 MB with BBWC Controller	462864-B21
	Smart Array P411 Controller	
	HP Smart Array P411/256MB Controller	482830-B21
	HP Smart Array P411/512MB Battery Backed Write Cache	462832-B21
	NOTE: Please see the following QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13203_div/13203_div.html (Smart Array P212 Controller) http://h18000.www1.hp.com/products/quickspecs/13201_div/13201_div.html (Smart Array P410 Controller) http://h18000.www1.hp.com/products/quickspecs/13202_div/13202_div.html (Smart Array P411 Controller)	
	Optional Upgrades	
	256 MB Cache Module	462968-B21
	NOTE: Supported on HP Smart Array P212 Controller only.	
	512MB BBWC	462967-B21
	NOTE: Supported on HP Smart Array P410 Controller and HP Smart Array P411 Controller only.	
	Battery Kit upgrade	462969-B21
	NOTE: To enable BBWC on the 256MB cache. NOTE: Supported on HP Smart Array P212 Controller, HP Smart Array P410 Controller, and HP Smart Array P411 Controller only.	
	SAS HBA	
	HP SC08Ge Host Bus Adapter	488765-B21
	NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.	
	HP HBA SAS-SATA 4x1LN Cable Kit	452130-B21
	NOTE: This option is required for any internal port HBA or controller that has a standard 4 port SAS/SATA connector. NOTE: Please see the following QuickSpecs for Technical Specifications and additional information: http://h18004.www1.hp.com/products/quickspecs/13082_div/13082_div.html (SC80Ge HBA)	
	SCSI HBA	



Additional Options

HP SC11Xe Host Bus Adapter	412911-B21
NOTE: Please see the following QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html (SC11Xe HBA)	

Tape Drives

NOTE: For the complete listing of Tape Drive offerings, please see: http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html	
USB Rack-Mount Tape Solutions	
HP StorageWorks 1U USB Rack-Mount Kit with one DAT 160 USB Tape Drive	AG703A
NOTE: Pre-configured with one DAT 160 USB tape drive.	
SAS Rack-Mount Tape Solutions	
NOTE: HP P212 Smart Array Controller SAS (462828-B21) is recommended for a dedicated HBA for SAS tape connection.	
HP StorageWorks 1U SAS Rack-Mount Kit with one LTO-4 Ultrium 1760	EH946A
NOTE: Pre-configured with one LTO-4 Ultrium 1760 SAS tape drive.	
HP StorageWorks DAT 160 SAS Internal Tape Drive	Q1587A
NOTE: Mounts inside the 1U SAS Rack-Mount Kit (AE459A)	
HP StorageWorks LTO-2 Ultrium 448 SAS Internal Tape Drive	DW085A
NOTE: Mounts inside the 1U SAS Rack-Mount Kit (AE459A)	
HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive	EH847A
NOTE: Mounts inside the 1U SAS Rack-Mount Kit (AE459A)	
NOTE: For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: http://www.hp.com/go/connect .	

Disk-Based Backup

HP StorageWorks RDX Removable Disk Backup System	
HP StorageWorks RDX320 Internal	AJ767A
NOTE: Requires HP 1U USB rack mount kit (A8007A) to install into 19" rack.	
HP StorageWorks RDX500 Internal	AJ934A
NOTE: Requires HP 1U USB rack mount kit (A8007A) to install into 19" rack.	
NOTE: Please see the HP RDX QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/13036_div/13036_div.html	
D2D Backup	
HP StorageWorks D2D2502i Backup System	EJ001A
NOTE: 2 TB raw capacity/1.5 TB useable capacity	
HP StorageWorks D2D2504i Backup System	EJ002A
NOTE: 4 TB raw capacity/3 TB useable capacity	
NOTE: Please see the HP D2D Backup Systems QuickSpecs for additional information: http://www.hp.com/go/d2d .	

Additional Options

Tape Autoloaders	HP StorageWorks 1/8 G2 Tape Autoloader	
	NOTE: HP P212 Smart Array Controller SAS (462828-B21) is recommended for a dedicated HBA for SAS tape connection.	
	HP StorageWorks 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader	AK377A
	NOTE: Requires HP 1/8 G2 Tape Autoloader rack kit (AH166A) to install into 19" rack.	
	HP StorageWorks 1/8 G2 LTO-3 Ultrium 920 SAS Autoloader	AH558A
	NOTE: Requires HP 1/8 G2 Tape Autoloader rack kit (AH166A) to install into 19" rack.	
	NOTE: Please see the Tape Autoloader QuickSpecs at: http://www.hp.com/go/automation for additional information.	
Tape Libraries	HP StorageWorks MSL2024 Tape Library	
	HP StorageWorks MSL2024 1 LTO-4 Ultrium 1760 SAS Drive Library	AK378A
	NOTE: HP P212 Smart Array Controller SAS (462828-B21) is recommended for a dedicated HBA for SAS tape connection.	
	HP StorageWorks MSL2024 1 LTO-2 Ultrium 448 SCSI Drive Library	AG116A
	NOTE: HP U320e SCSI HBA (AH627A) recommended MSL SCSI Tape Library connect.	
	HP StorageWorks MSL4048 Tape Library	
	HP StorageWorks MSL4048 2 LTO-4 Ultrium 1760 SAS Drive Library	AK380A
	NOTE: HP P212 Smart Array Controller SAS (462828-B21) is recommended for a dedicated HBA for SAS tape connection.	
	HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SAS Drive Library	AH560A
	NOTE: HP P212 Smart Array Controller SAS (462828-B21) is recommended for a dedicated HBA for SAS tape connection.	
Backup & Recovery Software	HP Data Protector Express	
	NOTE: One base product is required: BB117BA, BB118BA or BB117BT. Delivered as a media kit and License to Use (LTU).	
	HP Data Protector Express 4.0 SP1 Backup Server	BB117BA
	HP Data Protector Express 4.0 SP1 for Microsoft Small Business Server	BB118BA
	HP Data Protector Express Backup Server 4.0 SP1Upgrade from Data Protector Express Single Server Edition	BB117BT
	NOTE: This part number allows registered owners of Data Protector Express Single Server Edition to acquire Data Protector Express at a reduced cost. The product received is exactly the same as when the Data Protector Express Backup Server (BB117BA) is ordered.	
	HP Data Protector Express options	
	NOTE: These are added to one of the base products. Delivered as a License to Use (LTU).	
	HP Data Protector Express 4.0 SP1 Network Server Agent	BB121BA
	HP Data Protector Express 4.0 SP1 Network Server Agent 3 Pack	BB122BA
	HP Data Protector Express 4.0 SP1 Application Online Agent	BB125BA
	HP Data Protector Express 4.0 SP1 Bare Metal Disaster Recovery Option	BB128BA
	HP Data Protector Express 4.0 SP1 D2Any2Any Option	BB130BA
	HP Data Protector Express 4.0 SP1 Drive Expansion Option	BB133BA

Additional Options

NOTE: Please see www.hp.com/go/dataprotectorexpress for additional information:

HP StorageWorks Modular Smart Array	MSA SAN Storage Arrays	
	HP StorageWorks 60 Modular Smart Array	418408-B21
	NOTE: Please see the Modular Smart Array 60 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/12627_div/12627_div.html (Worldwide)	
	HP StorageWorks 70 Modular Smart Array	418800-B21
HP StorageWorks Fibre Channel HBAs	NOTE: Please see the Modular Smart Array 70 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html (Worldwide)	
	NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see: http://h18006.www1.hp.com/storage/saninfrastructure/hba.html	
	Brocade Fibre Channel HBAs	
	HP 81B PCIe 8Gb FC Single Port HBA	AP769A
	HP 82B PCIe 8Gb FC Dual Port HBA	AP770A
	HP 41B PCIe 4Gb FC Single Port HBA	AP767A
	HP 42B PCIe 4Gb FC Dual Port HBA	AP768A
	Emulex Fibre Channel HBAs	
	HP StorageWorks 81E 8Gb SP PCI-e FC HBA	AJ762A
	HP StorageWorks 82E 8Gb Dual-port PCI-e FC HBA	AJ763A
	HP StorageWorks FC2142SR 4Gb PCI-e HBA	A8002A
	HP StorageWorks FC2242SR Dual Channel 4 Gb PCI-e HBA	A8003A
	HP StorageWorks FC2143 4Gb PCI-X 2.0 -to-Fibre Channel HBA	AD167A
	HP StorageWorks FC2243 Dual Channel 4Gb PCI-X 2.0 HBA	AD168A
	QLogic Fibre Channel HBAs	
	HP StorageWorks 81Q PCI-e FC HBA	AK344A
	HP StorageWorks 82Q 8Gb Dual Port PCI-e FC HBA	AJ764A
	HP StorageWorks FC1142SR 4Gb PCI-e HBA	AE311A
	HP StorageWorks FC1242SR Dual Channel 4 Gb PCI-e HBA	AE312A
	HP StorageWorks FC1143 4Gb PCI-X 2.0 HBA	AB429A
	HP StorageWorks FC1243 Dual Channel 4Gb PCI-X 2.0 HBA	AE369A
	StorageWorks SCSI HBA	
	HP U320e SCSI Host Bus Adapter	AH627A
	NOTE: Recommended HBA for MSL SCSI Tape Library connect.	

Additional Options

Uninterruptible Power Systems	HP Rack-mountable UPS	
	HP R1500 G2 UPS	
	HP, R1.5kVA UPS, 1U, NA	AF419A
	HP, R1.5kVA UPS, 1U, INTL	AF418A
	HP, R1.5kVA UPS, 1U, JPN/TW	AF421A
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/12507_div/12507_div.html	
	HP R3000 UPS	
	HP R3000 VA UPS, 2U, DTC, INTL	AF414A
	HP R3000 VA UPS, 2U, Low Voltage L5-30, NA	AF422A
	HP R3000 VA UPS, 2U, High Voltage L6-20, NA	AF423A
	HP R3000 VA UPS, 2U, High Voltage L6-20, JPN	AF424A
	HP R3000 VA UPS, 2U, Low Voltage L5-30, JPN	AF425A
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/10671_div/10671_div.html	
	HP R3000v Uninterruptible Power System	
	HP R3000v UPS	AF444A
	NOTE: The R3000v is available in China and India only.	
	NOTE: Please see UPS QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/13129_div/13129_div.html (Worldwide)	
	HP Rack-Mountable R5500 UPS	
	HP R5500 VA UPS, INTL	AF416A
	HP R5500 VA UPS, NA/JPN	AF426A
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/11871_div/11871_div.html (Worldwide)	
	NOTE: For additional information on HP Uninterruptible Power Systems please go to: www.hp.com/servers/rackups .	
USB Options	USB 1.44-MB External Diskette Drive (Carbonite)	DC141B
	HP USB-P/S2 Mouse	DC369A
	HP 1GB USB 2.0 Floppy Drive Key	442085-B21
Rack Kit	Rack Adapter Kit	332815-B21
	NOTE: This kit allows HP rack servers to fit in racks that are 24" wide.	

Additional Options

HP Rack Series	HP Rack 5000 Series (Graphite Metallic)	
	HP 5642 Rack-Unassembled	358254-B21
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.html (Worldwide)	
	HP Rack 10000 G2 Series (Carbon/Graphite Metallic)	
	10642 G2 (42U) Rack Cabinet - Pallet	AF001A
	10642 G2 (42U) Rack Cabinet - Shock Pallet	AF002A
	10642 G2 (42U) Rack Cabinet - Crated	AF003A
	10642 G2 (42U) Rack Cabinet, with Extension - Shock Pallet	AF004A
	10636 G2 (36U) Rack Cabinet - Pallet	AF011A
	10636 G2 (36U) Rack Cabinet - Shock Pallet	AF012A
	10636 G2 (36U) Rack Cabinet - Crated	AF013A
	10636 G2 (36U) Rack Cabinet, with Extension - Shock Pallet	AF014A
	10622 G2 (22U) Rack Cabinet - Pallet	AF021A
	10622 G2 (22U) Rack Cabinet - Shock Pallet	AF022A
	10642 G2 (42U) Rack Cabinet 1200mm Deep - Shock Pallet	AF034A
	10642 G2 (42U) Rack Cabinet 1200mm Deep - Pallet	AF038A
	10842 G2 (42U) 800mm Wide Rack Cabinet - Pallet	AF041A
	10842 G2 (42U) 800mm Wide Rack Cabinet - Shock Pallet	AF042A
	10647 G2 (47U) Rack Cabinet - Pallet	AF031A
	HP S10614 (14U) Rack Cabinet - Shock Pallet	292302-B22
	10647 G2 (47U) Rack Cabinet 1200mm Deep - Shock Pallet	AF044A
	NOTE: Due to handling and shipping requirements, AF044A is only orderable through HP Factory Express. It is not for direct sales. Customer site surveys are required before an order is approved. CTO orders may require additional lead time.	
	10647 G2 (47U) Rack Cabinet 1200mm Deep - Pallet	AF045A
	NOTE: It is mandatory to use a shock pallet when shipping racks with equipment installed.	
	NOTE: xxxxxx-B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels).	
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html (Worldwide)	
	NOTE: For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower .	

HP Rack Options	Keyboards and Monitors	
	TFT7600 Rackmount Keyboard Monitor, US	AG052A
	TFT7600 Rackmount Keyboard Monitor UK	AG053A
	TFT7600 Rackmount Keyboard Monitor GR	AG054A
	TFT7600 Rackmount Keyboard Monitor FR	AG055A
	TFT7600 Rackmount Keyboard Monitor IT	AG056A
	TFT7600 Rackmount Keyboard Monitor SP	AG057A
	TFT7600 Rackmount Keyboard Monitor DEN	AG058A
	TFT7600 Rackmount Keyboard Monitor NOR	AG059A
	TFT7600 Rackmount Keyboard Monitor SE/FI	AG060A
	TFT7600 Rackmount Keyboard Monitor SWI	AG061A



Additional Options

TFT7600 Rackmount Keyboard Monitor PORT	AG062A
TFT7600 Rackmount Keyboard Monitor BEL	AG063A
TFT7600 Rackmount Keyboard Monitor JPN2	AG064A
TFT7600 Rackmount Keyboard Monitor RUS	AG065A
TFT7600 Rackmount Keyboard Monitor INTL	AG066A
1U Rackmount Keyboard with USB, US	AG072A
1U Rackmount Keyboard with USB, UK	AG073A
1U Rackmount Keyboard with USB, GR	AG074A
1U Rackmount Keyboard with USB, FR	AG075A
1U Rackmount Keyboard with USB, ITL	AG076A
1U Rackmount Keyboard with USB, SP	AG077A
1U Rackmount Keyboard with USB, DEN	AG078A
1U Rackmount Keyboard with USB, NOR	AG079A
1U Rackmount Keyboard with USB, SE/FI	AG080A
1U Rackmount Keyboard with USB, SWI	AG081A
1U Rackmount Keyboard with USB, PORT	AG082A
1U Rackmount Keyboard with USB, BEL	AG083A
1U Rackmount Keyboard with USB, JPN2	AG084A
1U Rackmount Keyboard with USB, RUS	AG085A
1U Rackmount Keyboard with USB, INTL	AG086A

HP KVM Switch Options

2 x 1 x 16 IP Console Switch with Virtual Media	AF601A
4 x 1 x 16 IP Console Switch with Virtual Media	AF602A
2 x 16 Server Console Switch with Virtual Media	AF600A
PS/2 Virtual Media Interface Adapter, 1 pack	AF604A

NOTE: Requires PS/2 and one USB port on server.

HP Server console switch 0x2x8	AF616A
HP Server console switch 0x2x16	AF617A
PS/2 Interface Adapter, 1 pack	262588-B21
PS/2 Interface Adapter, 8 pack	262587-B21

NOTE: Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL:

<http://www.hp.com/go/kvm>.

HP 1 x 4 Console Switch (ALL)	AF611A
PS2 Server Console Cable, 6 ft, 2 pack	AF612A
USB Server Console Cable, 6 ft, 2 pack	AF613A

NOTE: Required for supporting USB peripherals.

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>.

HP Serial Console Server Options

HP 16 Port Serial Console Server (worldwide)	AF101A
HP 48 Port Serial Console Server (worldwide)	AF102A
Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A

NOTE: Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: <http://www.hp.com/go/kvm>.

Additional Options

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>.

Service and Support Offerings (HP Care Pack Services)	Hardware Services On-site Service	
	Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic	U4479E
	4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	U4480E
	4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	U4481E
	6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	U4482E
	Installation & Start-up Services	
	Hardware Installation, Electronic	U4490E
	Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays, Electronic	U4491E
	Support Plus	
	Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, Electronic	U4492E
	Support Plus 24	
	Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U4493E
	Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic.	U6309E
	Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic.	U8331E
	NOTE: For more information, customer/resellers can contact: http://www.hp.com/hps/	

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

DDR3 memory population guidelines

NOTE: Charts do not represent all possible memory configurations.

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool:
www.hp.com/go/ddr3memory-configurator

Some DIMM installation guidelines are summarized below:

- For servers with nine (9) memory slots;
- There are three (3) channels per processor, per server.
- There are three (3) DIMM slots for each memory channel; nine (9) total slots.
- Memory channel 1 consists of the three (3) DIMMs that are closest to the processor.
- Memory channel 3 consists of the three (3) DIMMs that are furthest from the processor.
- DIMM slots that are white should be populated first.
- Do not mix Unbuffered memory (UDIMMs) with Registered memory (RDIMMs).
- To maximize performance, balance the total memory capacity between all installed processors.
- It is not required, but it is recommended to load the channels similarly if possible.
- You can only have up to eight (8) ranks installed per channel.
- You can only install two quad-rank DIMMs per channel.
- You can only install two UDIMMs per channel; if available, the third slot in the channel must remain empty.
- Populate DIMMs from heaviest load (quad-rank) to lightest load (single-rank) within a channel.
- Heaviest load (DIMM with most ranks) within a channel goes furthest from the chipset.
- For memory mirroring mode, channel 3 must be unpopulated. Channels 1 and 2 are populated identically.
- For lock-step mode, channel 3 must be unpopulated. DIMMs in channels 1 and 2 will be installed in pairs. The paired slots will be 1,4; 2,5; 3,6 on a 3DPC system or 1,4; 2,5; on a 2DPC system.
- No mixing DIMM voltage; all DIMMs must be the same voltage.

DDR3 DIMM slot/capacity/populated speed table

DIMM Type ->	Registered (RDIMMs)					Unbuffered with ECC (UDIMMs)	
DIMM Rank ->	Dual Rank (2R)				Quad Rank (4R)	Single Rank	Dual Rank (2R)
DIMM Capacity ->	2GB	4GB	8GB	8GB	4GB	1GB	2GB
DIMM Native Speed (MHz) ->	1333	1333	1066	1333	1066	1333	1333
SLOTS THAT CAN BE POPULATED							
9 slot servers	9	9	9	9	6	6	6
MAXIMUM CAPACITY (GB)							
9 slot servers	18	36	72	72	24	6	12
POPULATED DIMM SPEED (MHz)							
1 DIMM Per Channel	1333	1333	1066	1333	1066	1333	1333
2 DIMM Per Channel	1066	1066	1066	1066	800	1066	1066
3 DIMM Per Channel	800	800	800	800	*	*	*
* - not supported by HP at this time.							

NOTES:

- Mixing DIMM speeds is allowed, but the system processor speed rules always override the DIMM capabilities.
- If you do mix DIMM speeds, the memory bus will default to the minimum clock rate of all DIMMs in the system - even if the slower DIMM is on the other processor.
- If you install 1x 1066MHz DIMM in channel 1 and 1x 1333MHz DIMM in channel 2, you still run at 1066MHz.
- If you install 1x 1066MHz DIMM in channel 1 and 5x 1333MHz DIMMs with 1 DIMM Per Channel (DPC) in each of the other channels, you run at 1066MHz.
- If you install 3DPC in one channel (if applicable) and 1DPC in all other channels, you run at 800MHz.



Memory

- 95 Watt CPU's are required for 1333MHz DIMM speeds. All other CPU's are capable of up to 1066MHz.
- References to the above MHz speeds are for the various speeds of DDR3 DIMMs; 1333 refers to DDR3-1333, etc.

DIMM slot and configuration diagrams

Basic memory slot & population diagram

- Population order; start with "A" first, "B" second, "C" third, etc.

9 DIMM SLOTS		
	CPU1	
	slot #	population order
Chnl 1	1	G
	2	D
	3	A
Chnl 2	4	H
	5	E
	6	B
Chnl 3	7	I
	8	F
	9	C

Standard memory configuration

- 6GB, consisting of three (3) 2GB dual-rank PC3-10600 RDIMMs

	CPU1	
	slot #	population order
Chnl 1	1	G; empty
	2	D; empty
	3	A; 2GB DIMM
Chnl 2	4	H; empty
	5	E; empty
	6	B; 2GB DIMM
Chnl 3	7	I; empty
	8	F; empty
	9	C; 2GB DIMM

Standard memory plus optional memory

- 54GB, consisting of three (3) 2GB RDIMMs plus six (6) 8GB RDIMMs
- 3x 2GB dual-rank PC3-10600 RDIMMs
- 6x 8GB dual-rank PC3-10600 RDIMMs

Memory

	CPU1	
	slot #	population order
Chnl 1	1	G; 8GB DIMM
	2	D; 8GB DIMM
	3	A; 2GB DIMM
Chnl 2	4	H; 8GB DIMM
	5	E; 8GB DIMM
	6	B; 2GB DIMM
Chnl 3	7	I; 8GB DIMM
	8	F; 8GB DIMM
	9	C; 2GB DIMM

Standard memory replaced with optional memory
RDIMM maximum configuration

- 72GB, consisting of nine (9) 8GB dual-rank PC3-10600 RDIMMs

	CPU1	
	slot #	population order
Chnl 1	1	G; 8GB DIMM
	2	D; 8GB DIMM
	3	A; 8GB DIMM
Chnl 2	4	H; 8GB DIMM
	5	E; 8GB DIMM
	6	B; 8GB DIMM
Chnl 3	7	I; 8GB DIMM
	8	F; 8GB DIMM
	9	C; 8GB DIMM

UDIMM maximum configuration (2 UDIMMs per Channel limit)

- 12GB, consisting of six (6) 2GB dual-rank PC3-10600 UDIMMs

	CPU1	
	slot #	
Chnl 1	1	G; empty
	2	D; 2GB DIMM
	3	A; 2GB DIMM
Chnl 2	4	H; empty
	5	E; 2GB DIMM
	6	B; 2GB DIMM
Chnl 3	7	I; empty
	8	F; 2GB DIMM
	9	C; 2GB DIMM

NOTES;
Memory configurations above do not apply to "Factory Integrated Models".

Memory

Capacity references are rounded to the common Gigabyte values.

- 1GB = 1024MB
- 2GB = 2048MB
- 4GB = 4096MB
- 8GB = 8192MB

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool:
www.hp.com/go/ddr3memory-configurator

Storage

1- 4 Four SATA or SAS drive bays



A Optical Drive Bay: Optional 9.5mm DVD-ROM, or DVD-RW drive

Drive Support

	Quantity Supported	Position Supported	Controller
Removable Media			
All Models: 9.5mm DVD-ROM or DVD-RW Drive	Up to 1	A	HP embedded SATA Controller

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
300GB 6G 10K DP	Up to 2	1-2	HP embedded 4 Port SATA Controller with RAID 0/1 support
300GB 3G 10K DP	Up to 4	1-4	HP SC08Ge Host Bus Adapter
146GB 6G 15K DP	NOTE:	NOTE:	NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.
146GB 3G 15K DP	depending on model.	depending on model.	HP Smart Array P212/256MB Controller
146GB 6G 10K DP			
146GB 3G 10K DP			
72GB 6G 15K DP			
72GB 3G 15K DP			
72GB 3G 10K DP			

SAS Hot Plug 3.5" Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
600GB 6G 15K DP	Up to 2	1-2	HP embedded 4 Port SATA Controller with RAID 0/1 support
450GB 6G 15K DP	Up to 4	1-4	HP SC08Ge Host Bus Adapter
450GB 3G 15K DP	NOTE:	NOTE:	NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.
400GB 3G 10K DP	depending on model.	depending on model.	HP Smart Array P212/256MB Controller
300GB 6G 15K DP			
300GB 3G 15K DP			
146GB 3G 15K DP			
72GB 3G 15K DP			

Storage

SAS Hot Plug SFF Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
500GB 7.2K SFF DP	Up to 2	1-2	HP embedded 4 Port SATA Controller with RAID 0/1 support
	Up to 4	1-4	HP SC08Ge Host Bus Adapter
	NOTE: depending on model.	NOTE: depending on model.	NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS. HP Smart Array P212/256MB Controller

SAS Hot Plug 3.5" Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB SAS 7.2K DP	Up to 2	1-2	HP embedded 4 Port SATA Controller with RAID 0/1 support
750GB SAS 7.2K DP	Up to 4	1-4	HP SC08Ge Host Bus Adapter
	NOTE: depending on model.	NOTE: depending on model.	NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS. HP 8 Internal Port SAS HBA with RAID
			NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS. HP Smart Array P212/256MB Controller

SATA Hot Plug 3.5" Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 3G SATA 7.2K	Up to 2	1-2	HP Smart Array P212/256MB Controller
750GB 3G SATA 7.2K	Up to 4	1-4	
500GB 3G SATA 7.2K	NOTE: depending on model.	NOTE: depending on model.	
250GB 3G SATA 7.2K			

SATA Hot Plug SFF Entry (ETY) Drives

	Quantity Supported	Position Supported	Controller
250GB 3G SATA 5.4K	Up to 4	1-4	HP Smart Array P212/256MB Controller
120GB 1.5G SATA 5.4K			

SATA Hot Plug SFF Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
500GB 3G SATA 7.2K	Up to 2	1-2	HP Smart Array P212/256MB Controller
160GB 3G SATA 7.2K	Up to 4	1-4	
	NOTE: depending on model.	NOTE: depending on model.	

SATA Hot Plug 3.5" Entry (ETY) Drives

	Quantity Supported	Position Supported	Controller
160GB 3G SATA 7.2K	Up to 4	1-4	HP Smart Array P212/256MB Controller



Storage

SATA Hot Plug Midline (MDL) Solid State Drives

	Quantity Supported	Position Supported	Controller
60GB 3.0G SATA SSD	4	1-4	HP Smart Array P212/256MB Controller
120GB 3.0G SATA SSD			

SATA Hot Plug 3.5" Midline (MDL) Solid State Drives

	Quantity Supported	Position Supported	Controller
60GB 3.0G SATA SSD	4	1-4	HP Smart Array P212/256MB Controller
120GB 3.0G SATA SSD			

External Storage

	Quantity Supported	Position Supported	Host Controller or Adapter
60 Modular Smart Array	Up to 8	External	HP Smart Array P411/512 BBWC Controller
	Up to 4		HP Smart Array P212/256MB Controller
70 Modular Smart Array	Up to 4	External	HP Smart Array P411/512 BBWC Controller
	Up to 2		HP Smart Array P212/256MB Controller
HP 2000sa Modular Smart Array Controller	Up to 4	External	HP SC08Ge Host Bus Adapter

Maximum Storage Capacity – (SAS drives)

Internal	1.0 TB (2 x 500GB SAS)
External	7.0TB (1 x (14 x 500GB SAS))
Total	8.0 TB

NOTE: In order to implement integrated SATA RAID with Smart Start 7.90 on Windows 2000/2003, the use of a floppy drive is necessary.

Maximum Storage Capacity – (SATA Drives)

Internal	4TB (4 x 1TB SATA)
External	12TB (1 x (12 x 1TB SATA))
Total	16TB

Tape and Disk-Based Backup

NOTE: For a complete listing of compatible tape and disk-based backup offerings, please visit: www.hp.com/go/connect

	Position Supported	Controller	Controller Part Number
HP StorageWorks SCSI Tape Drives, External	External	HP SC11Xe Host Bus Adapter	412911-B21
LTO-1 Ultrium 232			
LTO-2 Ultrium 448			
LTO-3 Ultrium 920			
LTO-3 Ultrium 960			
LTO-4 Ultrium 1760			
LTO-4 Ultrium 1840			
DAT 40			
DAT 72			
DAT 160			



Storage

1U Rack-Mount Kit
3U Rack-Mount Kit

HP StorageWorks USB Tape Drives, External DAT 40 USB DAT 72 USB DAT 160 USB 1U USB Rack-Mount Kit	External	USB 2.0 Port	N/A
HP StorageWorks SAS Tape Drives, External DAT 160 SAS LTO-2 Ultrium 448 SAS LTO-3 Ultrium 920 SAS LTO-4 Ultrium 1760 SAS LTO-4 Ultrium 1840 SAS 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP SC44Ge Host Bus Adapter	416096-B21
HP StorageWorks SCSI Tape Automation, External DAT 72x10 Autoloader 1/8 G2 Tape Autoloader MSL2024 MSL4048 MSL8096 MSL6000	External	HP SC11Xe Host Bus Adapter HP U320e SCSI Host Bus Adapter NOTE: Recommended for MSL tape libraries.	412911-B21 AH627A
HP StorageWorks SAS Tape Automation, External 1/8 G2 Autoloader MSL2024 MSL4048	External	HP SC44Ge Host Bus Adapter	416096-B21
HP StorageWorks Fibre Tape Automation, External MSL2024 MSL4048 MSL8096 MSL6000	External	Please consult the EBS connectivity matrix at: http://www.hp.com/go/ebs for detailed connectivity information.	N/A
HP StorageWorks RDX Removable Disk Backup System RDX160 RDX320 RDX500	External	USB 2.0 Port	N/A

Storage

HP StorageWorks D2D Backup Systems	External	Embedded Network Controller	N/A
D2D120			
D2D130			
D2D2500i			
D2D4000i			

Power Specifications

HP 460W Power Supply

Part Number - AC 460W PSU 503296-B21 Option Kit

Input Voltage Range (Vrms) 100 to 240

Frequency Range (Nominal) 50/60 (Hz)

Nominal Input Voltage (Vrms)	100	120	200	208	220	230	240
Maximum Rated Output Wattage	460	460	460	460	460	460	460
Nominal Input Current (A rms)	5.5	4.5	2.6	2.5	2.4	2.3	2.2
Max Rated Input Wattage Rating (Watts)	526	520	505	505	503	503	503
Max. Rated VA (Volt-Amp)	548	542	527	527	524	524	524
Efficiency (%) at Max. Rated Output Wattage	87.5	88.5	91	91	91.5	91.5	91.5
Power Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Leakage Current (mA)	0.42	0.50	0.83	0.87	0.92	0.96	1.00
Max. Inrush Current (A peak)	30	30	30	30	30	30	30
Max. Inrush Current duration (mS)	20	20	20	20	20	20	20
Maximum British Thermal Unit Rating (BTU-Hr)	1794	1773	1725	1725	1715	1715	1715

Technical Specifications

System Unit	Dimensions (H x W x D) 1.70 x 17.64 x 26.85 in (4.32 x 44.80 x 68.19 cm) (with bezel)	
	Weight (approximate)	Maximum (four hard drives, power supply, and processor installed) 29.95 lb (13.6kg)
		Minimum (one hard drive, power supply, and processor installed) 25.52lb (11.6kg)
	Input Requirements (per power supply)	Range Line Voltage 90 - 132 VAC, 180 - 264 VAC
		Rated Input Current 6 A (at 100 VAC), 3 A (at 200 VAC)
		Rated Input Frequency 47 to 63 Hz
		Rated Input Power 486 W (at 100 VAC), 479 W (at 200 VAC)
	BTU Rating	Maximum 1836 BTU/hr (at 100 VAC), 1706 BTU/hr (at 200 VAC)
	Power Specifications	
	NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor	
Power Supply Output (per power supply)	- Click on the system of interest. Example: DL320 G6 - Follow the instructions of the next screens.	
	Rated Steady-State Power	400 W (at 100 VAC), 400 W (at 200 VAC)
		Maximum Peak Power 400 W (at 100 VAC), 400 W (at 200 VAC)
System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).
	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
Relative Humidity (non-condensing)	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Technical Specifications

	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	Idle	
	LWAd	6.25 B
	LpAm	51.4dBA
	Operating	
	LWAd	6.25 B
	LpAm	51.4 dBA
Emissions	FCC Rating	Class A
Classification (EMC)	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1
NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.		

Power Supply	Input voltage specifications	Rated input voltage	100 VAC to 240 VAC
	Input Specifications	Rated input line	90 VAC to 264VAC
		Frequency range	47 to 63 Hz
		Rated input power	@ 115V input, Rated input power = 486W (assume output wattage=450W) @ 230V input, Rated input power = 479W (assume output wattage=450W)
		Rated input current	6 A, 3 A (110 V, 220 V)
	BTU Rating	Steady state power	420W (rated)
		1710 BTU/hr	
	Ambient temperature range	Operating	50° to 118° F (10° to 48° C)
		Non-operating	-40° to 158° F (-40° to 70° C)
	Relative humidity (non-condensing)	Operating	55% to 85%
		Non-operating	5% to 95%
Dielectric voltage withstand		Input to output	1800 VAC/minute
		Input to ground	1800 VAC/minute
Maximum Wet Bulb Temperature		106.3° F (41.3° C)	

Technical Specifications

Integrated Serial ATA Controller	Simultaneous drive transfer channels	4 channels
	Transfer rate synchronous (maximum theoretical)	150 MB/s per channel
	Data transfer method	Intel® 82801IR Integrated Serial ATA Host Controller (non-RAID mode) Intel® 82801IR Integrated Serial ATA Host Controller (RAID Mode)
	Drive support	Serial ATA
	Data transfer modes	Legacy Mode Combined Mode
	Protocol	Serial ATA
	Feature	NCQ (Native Command Queuing); AHCI (Advanced Host Controller Interface)
	RAID levels supported	0, 1
	RAID Features	Supports multiple logical volumes Setup through ROM based Array Configuration Utility Installation scripting support NOTE: This controller does not support Hot Plug functions or LED functions.
	RAID OS Support	Microsoft Windows Server 2003 NOTE: In order to implement integrated SATA RAID with Smart Start 7.90 on Windows 2000/2003, the use of a floppy drive is necessary. Linux (Red Hat, SuSE, UnitedLinux)

Embedded NC326i Dual Network Interface Port Gigabit Server Adapter	10Base-T/ 100Base-TX/ 1000Base-TX	
	Compatibility	IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX
	Data Transfer Method	Four lane (x4), 100MHz PCI Express Reference Clock
	Network Transfer Rate	10Base-T (Half-Duplex) 10 Mb/s
		10Base-T (Full-Duplex) 20 Mb/s
		100Base-TX (Half-Duplex) 100 Mb/s
		100Base-TX (Full-Duplex) 200 Mb/s
		1000Base-TX (Half and Full-Duplex) 2000 Mb/s
	Connector	RJ-45
	Cable Support	10Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m)
		10/100/1000Base-TX Category 5 UTP; up to 328 ft (100 m)

Technical Specifications

Environment-friendly Products and Approach	End-of-life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p>
--	--	--

© Copyright 2009 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.

Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.